



AM~FINN

HIMALAYAN SALT PANELS INSTALLATION GUIDE


1-800-237-2862

design@am-finn.com

am-finn.com

Salt Wall Systems

Hanging Wall Snap Fit Design

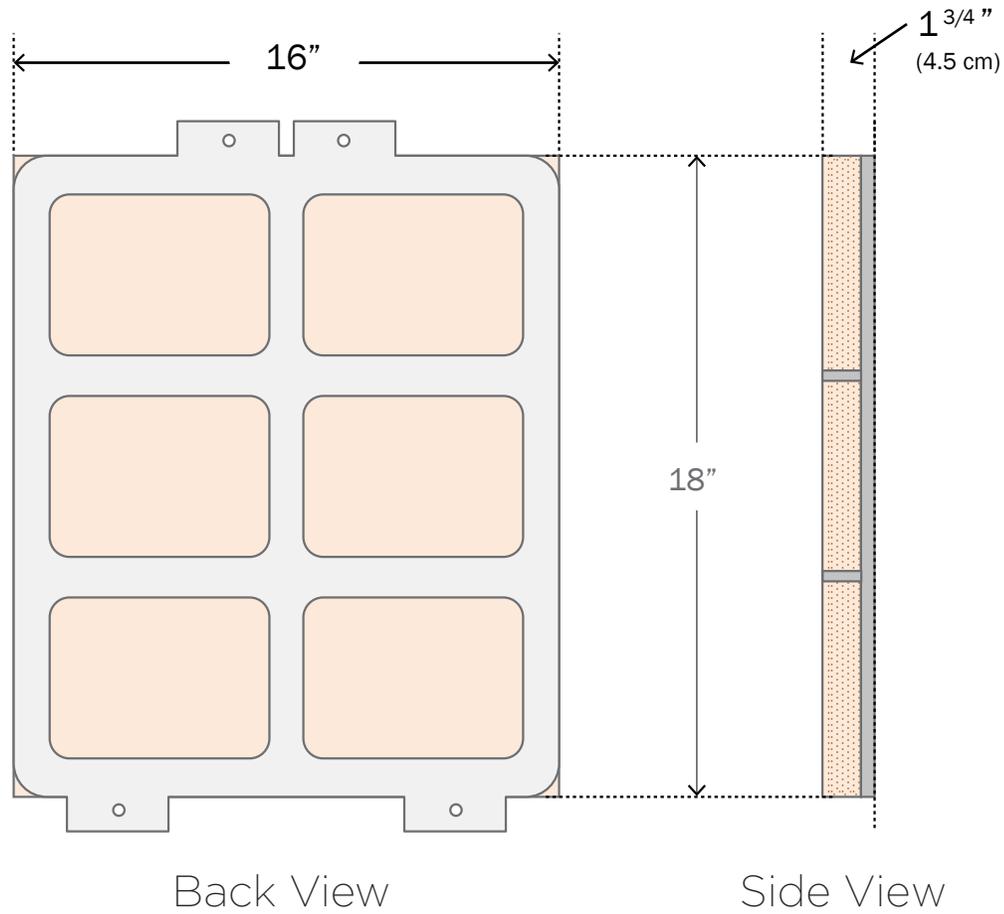

HANGING WALL PANEL FOR EXISTING WALL STRUCTURE

The following example is for a 10 panel (W 80" x H 36") salt wall.

1- Prepare Wood Mounting Platform

Individual salt panels weigh 22 lbs which require a strong mounting platform. Most existing wall structures include drywall, CMU, or brick. Unless the mounting surface is a minimum of 3/4" wood, a wood mounting platform for the panels is required.


Cut plywood (min 3/4" thickness) one inch bigger on all four sides than the dimensions of the size of the planned salt wall. For example: if salt wall dimensions are W 80 x H 36, cut mounting board W 82 x h 38. (particleboard not acceptable mounting surface). Ensure plywood is level and squared.

2- Install wood Mounting system

Salt walls can be installed at any elevation or angle. Once the location is determined, you must anchor the mounting board onto structural wall (e.g., framing or rock wall).

3- Mark Centerline

Once the mounting board is anchored, you must distinguish the center lines. Strike both horizontal and vertical center lines.


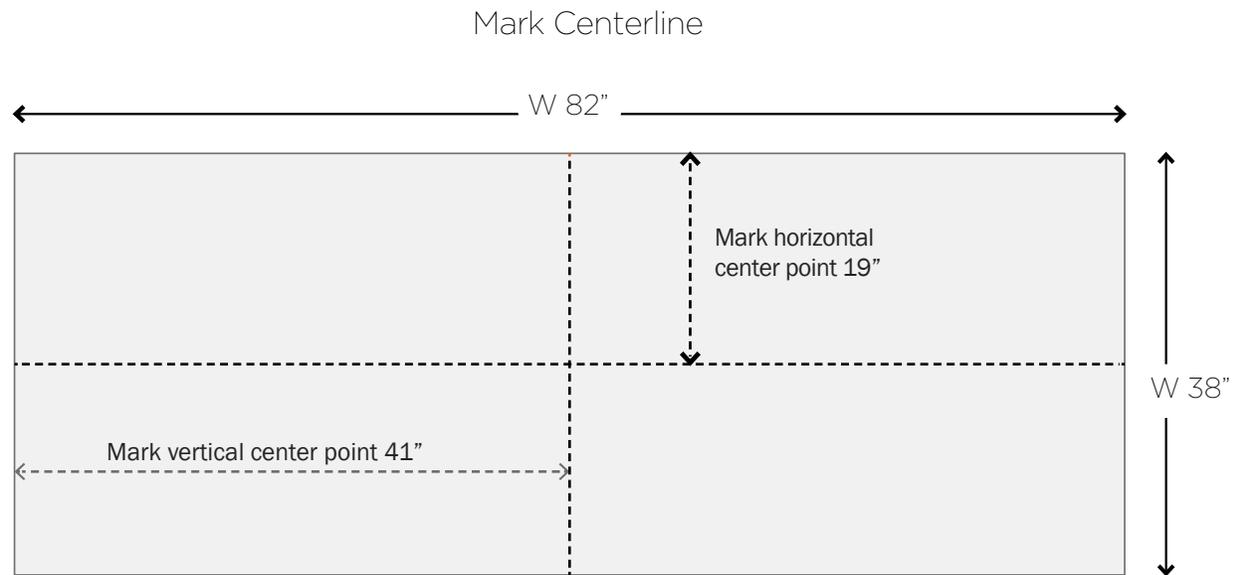


Example for 10 panel wall W 80" x H 36".
Mounting panel measures W 82" x H 38"

INSTALLATION INSTRUCTIONS


4- Install the Anchor Panels

The first panel installed in a salt wall is the most important; it's called the bottom anchor panel. The bottom anchor panel needs to be the center panel of the bottom row. If the bottom row contains an even number of panels, the anchor panel needs to be the center-right panel.

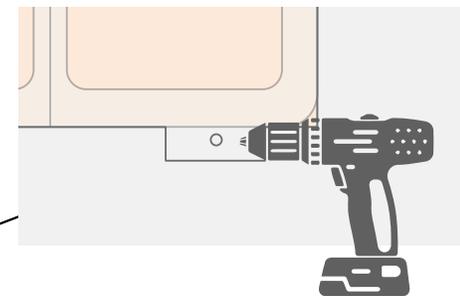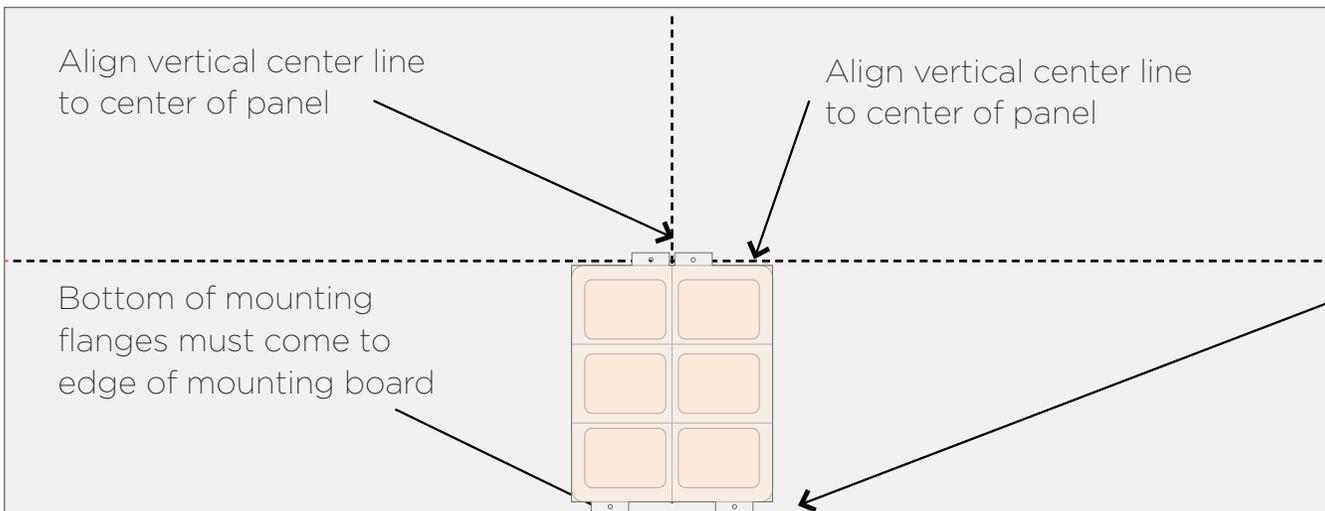

Note:
Use power drill to mount stainless panel screws


Note:
If row consists of even number of panels, begin with the center right panel as the anchor panel.

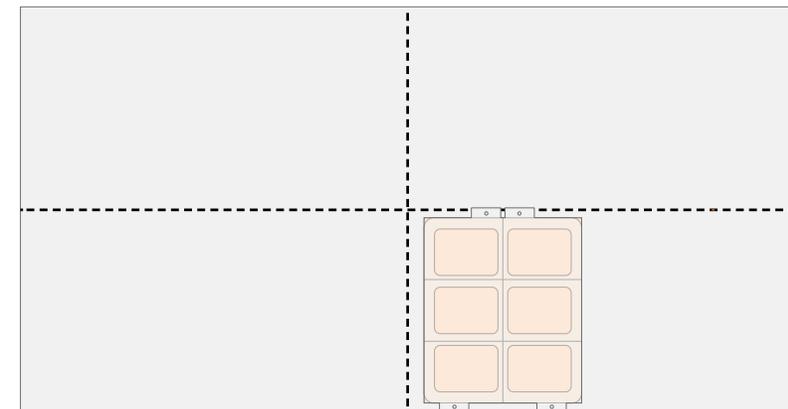

INSTALLATION INSTRUCTIONS

5- Install the Row Panels


Once the center anchor panel is installed, mount the remaining row panels outward. Ensure that each panel is level with the horizontal centerline and is snug with the adjacent panel.

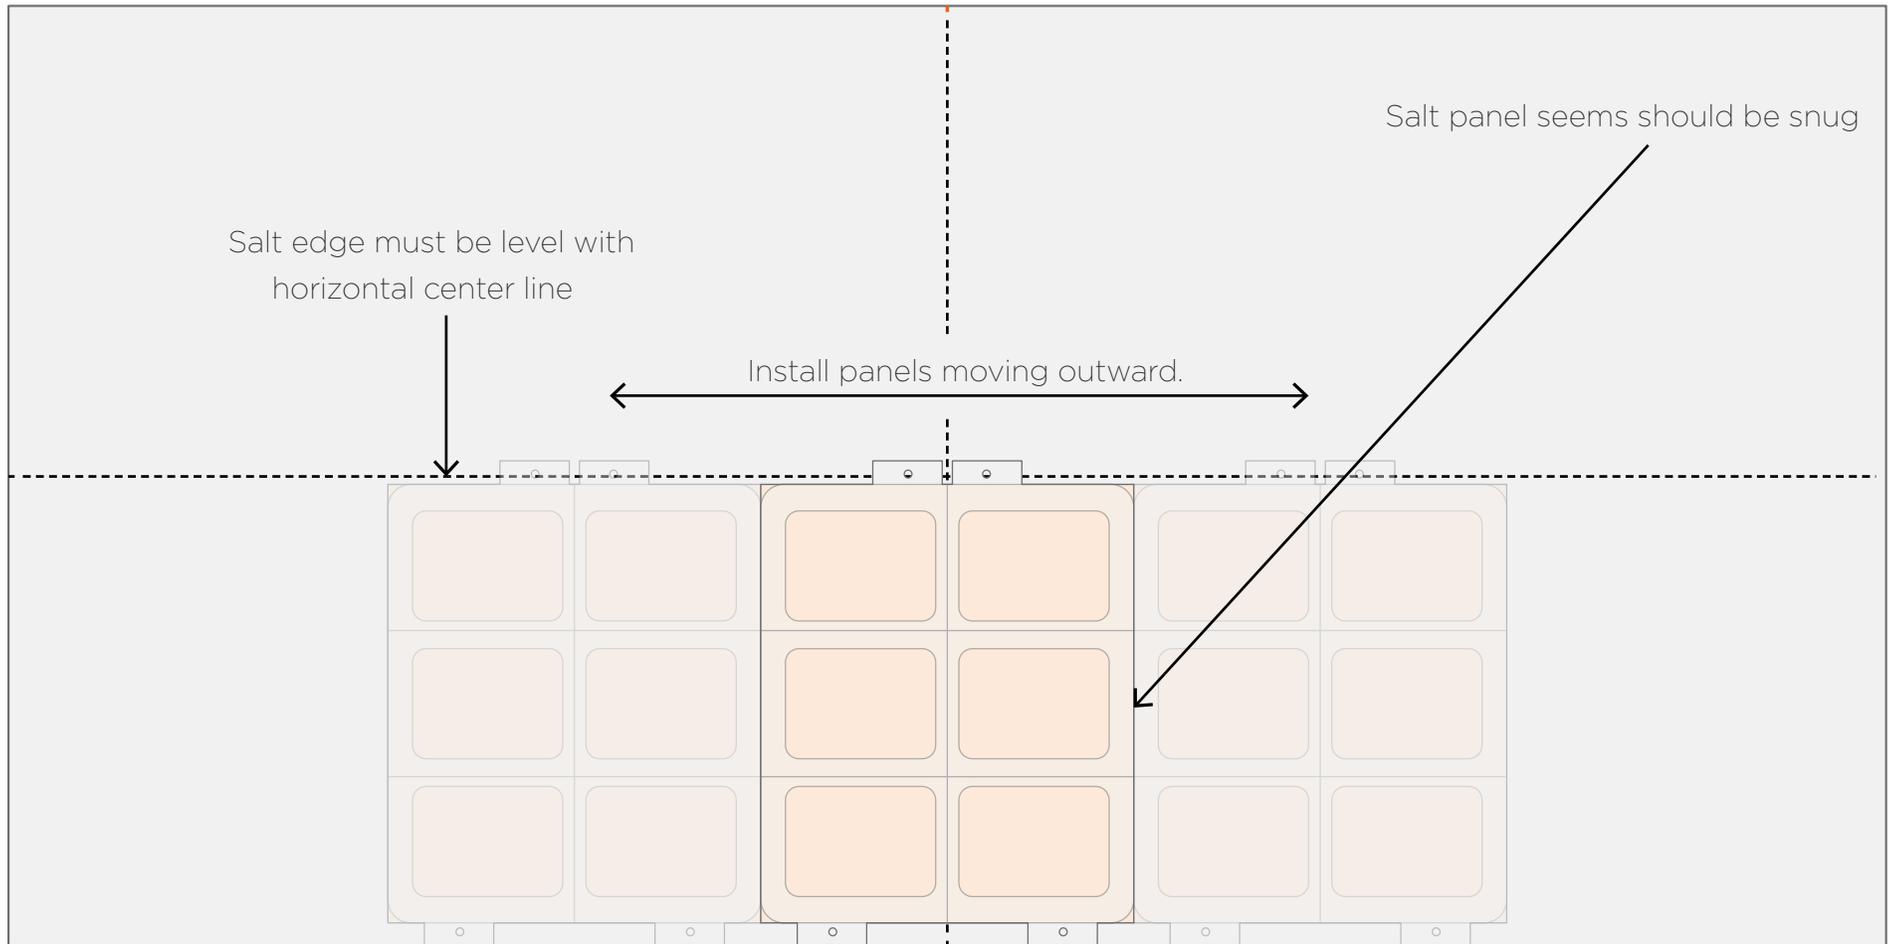

INSTALLATION INSTRUCTIONS

6- Install Second Row Panels

Once a second-row anchor is complete, install second-row panels outward. Assure there is a snug seam at the bottom. Use a protractor to assure that both lower corners are 90 degrees (adjust as necessary).

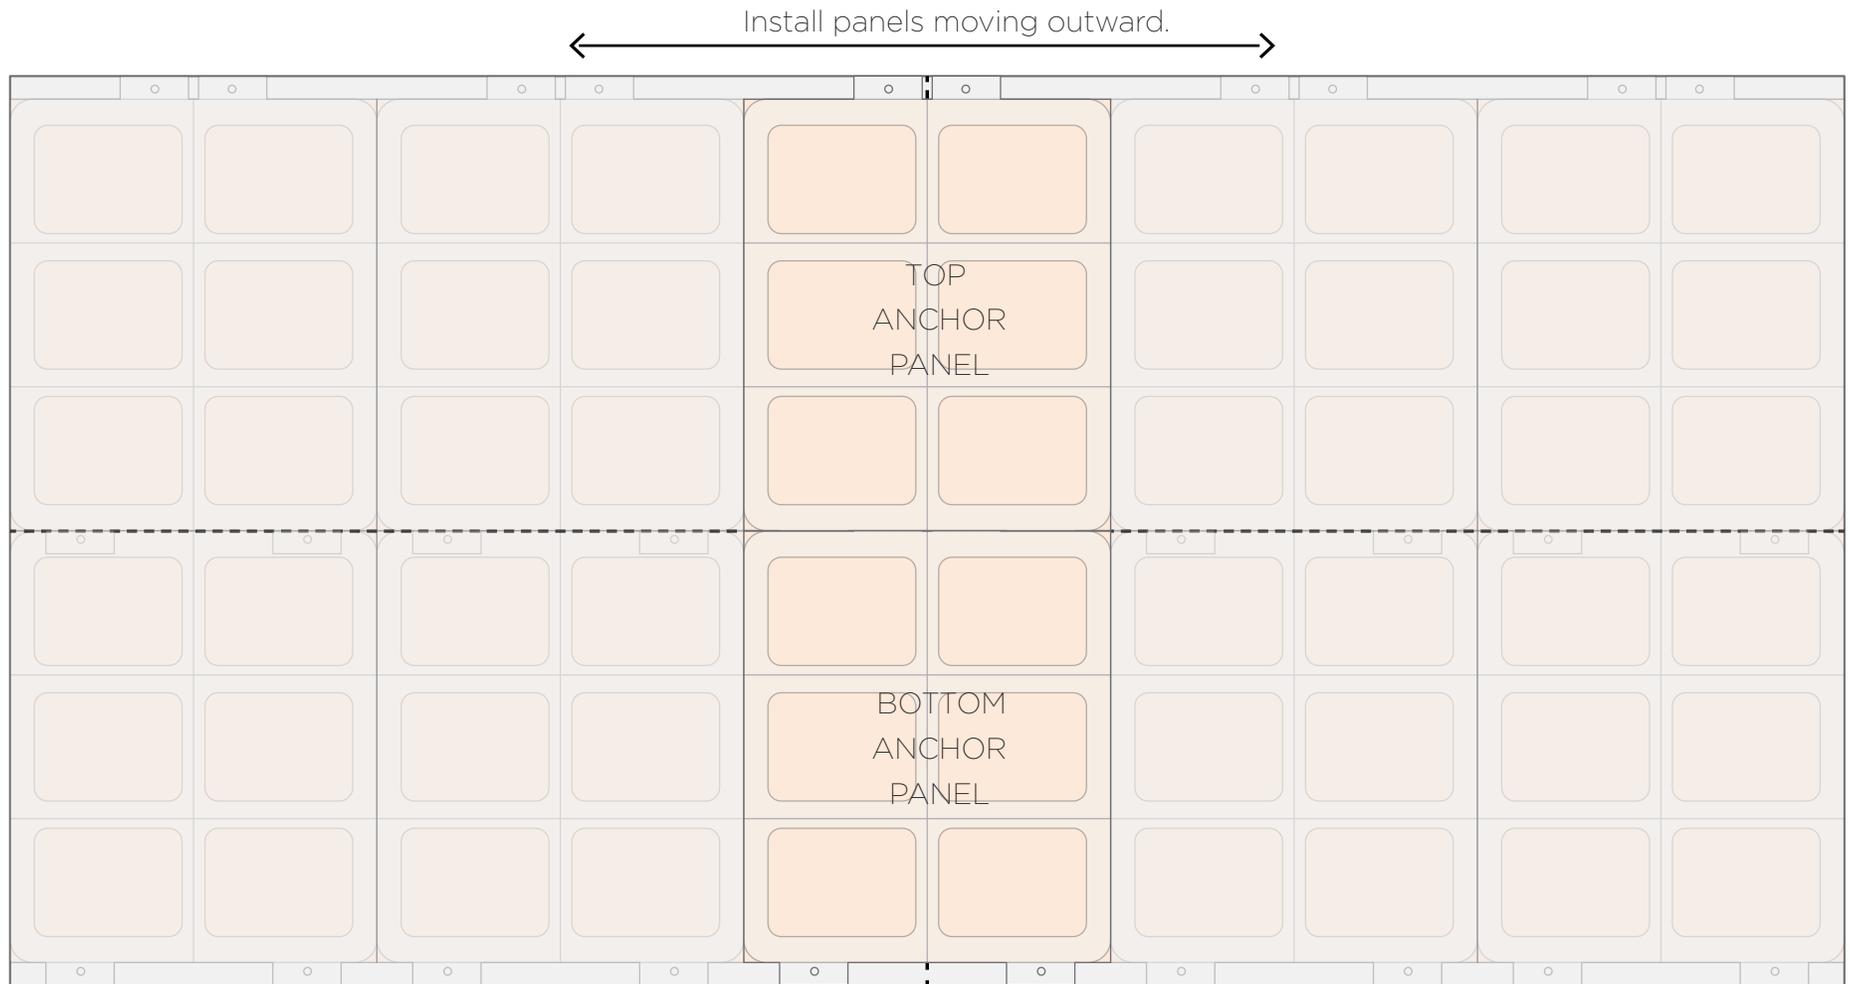



AM~FINN

1-800-237-2862

design@am-finn.com

am-finn.com